

CIPOLLINI

CIPOLLINI®

2025

LIVE YOUR RIDE



RB1K AD.ONE 04



RB1K THE ONE 10



DOLOMIA 16



NKTT 44



NKTR 50



SPEED 54



ITACA 24



BOND EVO 32



AGO 38



FLUSSO 60



FYBRA R 66



FYBRA GX 72

La bicicletta ha un'anima.
Se si riesce ad amarla,
vi darà emozioni che
non dimenticherete mai.

The bicycle has a soul.
If you can love it,
it will give you emotions
you will never forget.

Cipollini

RB1K AD.ONE

AERO

RB1K Ad.One è il connubio perfetto tra aerodinamica, leggerezza, reattività. Il telaio monoscocca in carbonio leggero e aerodinamico è la soluzione per esprimere al meglio ogni singolo watt. RB1K Ad.One: **progettato per eccellere.**

RB1K Ad.One is the perfect combination of aerodynamics, lightness, and reactivity. The lightweight and aerodynamic carbon monocoque frame is the solution to best express every single watt. RB1K Ad.One: **designed for excellence.**

myCIPOLIPO

CUSTOMIZABLE ON MCIPOLLINI.COM



RB1K AD.ONE



COBALT BLUE - CARBON - WHITE SHINY 22

CIPOLLINI

L'AERODINAMICA DELLA CRONO PORTATA SU STRADA

RB1K AD.ONE applica gli studi aerodinamici della NKTT e la guidabilità di una bicicletta da strada.

SEZIONI DIFFERENZIATE DEI TUBI E DEI FAZZOLETTI IN BASE ALLA TAGLIA

Telaio studiato per garantire la stessa rigidità e guidabilità su ognuna delle sei taglie disponibili.

PERNI PASSANTI IN TITANIO

Nessun compromesso per la massima rigidità del tuo telaio RB1K AD.ONE.

1 X READY

Cover monocrona per maggiore aerodinamica con una soluzione che elimina il deragliatore.

ASOLA MAGGIORATA PER MANUTENZIONI IDRAULICHE

L'asola maggiorata permette una facile manutenzione senza rimozione dell'ogiva.

TECNOLOGIA TCM

Il vero telaio monoscocca, permette la perfetta connessione del carro su movimento centrale.

TIME TRIAL AERODYNAMICS FOR A ROAD MACHINE

RB1K AD.ONE matches the NKTT aerodynamics and the handling of a road bike.

DIFFERENT TUBES AND CONNECTION SECTIONS ON EACH SIZE

The frame has been engineered to guarantee the same stiffness and handling in each size.

TITANIUM THRU AXLE

No compromises for the maximum stiffness on your RB1K AD.ONE.

1 X READY

Specific cover dedicated to those who want the maximum aerodynamics without the front derailleur.

INCREASED BUTTONHOLE FOR HYDRAULIC MAINTENANCE

The increased dimension of the buttonhole allows an easy maintenance: you can unroute the cable with the ogive on.

TCM TECHNOLOGY

The real monocoque frame, allowing the perfect connection between the rear triangle and the bottom bracket.

RB1K AD.ONE



CARBON-ANTHRACITE-RED SHINY 22



ANTHRACITE - CARBON - LIME MATT 22

RB1K THE ONE

AERO

RB1K The One vuol dire velocità. Che tu sia in volata prima di un traguardo o in sessione di allenamento, il telaio The One con tecnologia TCM saprà stupirti.

RB1K The One: **domina ogni metro di strada ancora prima di averlo percorso.**

RB1K The One is the perfect combination of aerodynamics, lightness, and reactivity. The lightweight and aerodynamic carbon monocoque frame is the solution to best express every single watt.

RB1K The One: **designed for excellence.**

my///CIPO

CUSTOMIZABLE ON MCIPOLLINI.COM

RB1K THE ONE



WHITE PEARL-CARBON-BLUE SHINY 23

LA VISIONE DI MARIO CIPOLLINI ANCHE IN VERSIONE FRENO A DISCO

RB1K The One è la visione di potenza e rigidità di Mario Cipollini applicata alla bicicletta.

GEOMETRIE RACE

RB1K The One è votata all'agonismo e le geometrie seguono questa filosofia.

TECNOLOGIA TCM

Il vero telaio monoscocca, permette la perfetta connessione del carro su movimento centrale.

T1000 CON FINITURE DIFFERENZIATE TRA FRENO A DISCO E RIM

Alto modulo tipico dell'alto di gamma MCipollini con finitura 3k per la versione a disco, 1k per la rim brake.

PROFILO TUBO TRIANGOLO POSTERIORE MAGGIORATO

Maggiore rigidità strutturale per un trasferimento di potenza diretto al terreno.

RIGIDEZZA ELEVATISSIMA

Avantreno e tubo sterzo consentono di ottenere elevatissimi valori di rigidità flessionale.

MARIO CIPOLLINI'S VISION ALSO IN DISC BRAKE VERSION

RB1K The One is the vision of power and stiffness Of Mario Cipollini applied to the bicycle.

RACE GEOMETRIES

Built for racing.

TCM TECHNOLOGY

The true monocoque frame: all in one piece, with no bonding.

T1000 WITH DIFFERENTIATED FINISHES BETWEEN DISC BRAKE AND RIM

High modulus typical of high-end MCipollini with 3k finish for disc version, 1k for rim brake.

INCREASED REAR TRIANGLE PROFILE

Increased structural rigidity for direct power transfer to the ground.

VERY HIGH STIFFNESS

Front end and head tube allow for very high flexural stiffness values.

RB1K THE ONE



BLACK-CARBON-SILVER SHINY 23



CARBON-SILVER-RED METAL SHINY 23

DOLOMIA

LIGHT

Dolomia è la massima espressione di leggerezza e reattività. Dai brevi strappi alle lunghe salite di montagna, questo telaio ti sorprenderà ad ogni pedalata.

Dolomia: **la leggerezza per conquistare qualsiasi salita.**

Dolomia is the maximum expression of lightness and reactivity. From short uphill to long mountain climbs, this frame will surprise you with every pedal stroke.

Dolomia: **the lightness to conquer any climb.**

myMCIPO

CUSTOMIZABLE ON MCIPOLLINI.COM

DOLOMIA



WHITE-SAND-CARBON SHINY/MATT 25

CIPOLLINI



TELAIO

Il Telaio più leggero della gamma. 780g. (taglia M).

GEOMETRIE PERFORMANCE

Reattività propria dei telai Cipollini grazie alle geometrie studiate per ogni taglia.

PASSAGGIO CAVI INTERNO

Massima integrazione per i cablaggi idraulici e elettronici grazie alla serie sterzo da 1"1/2 e alla specifica forcella.

FINITURA 3K

Il tessuto 3K offre il miglior rapporto rigidità / peso ottenibile su telai in fibra di carbonio.

TECNOLOGIA TCM

Il vero telaio monoscocca, permette la perfetta connessione del carro su movimento centrale.

ASSEMBLAGGIO

Assemblato con la componentistica più leggera rispettando i limiti consentiti dall'UCI.



FRAME

The lightest frame of the range. 780g. (size M).

PERFORMANCE GEOMETRIES

Reactiveness typical of Cipollini frames thanks to optimised geometries for each size.

INTERNAL CABLE ROUTING

Fully integrated cabling thanks to the specifically designed fork and steering.

3K FINISH

The 3K finishing offers the optimal stiffness / weight ratio in carbon fibre frames.

TCM TECHNOLOGY

The true monocoque frame: all in one piece, with no bonding.

ASSEMBLY

Assembled with the lightest components within the limits set by UCI.



DOLOMIA

CIPOLLINI



GREY NARDÒ - DEEP OCEAN - BLACK SHINY 24

DOLOMIA



BLACK-BLACK-CARBON SHINY/MATT

ITACA

ENDURANCE

Itaca rappresenta la possibilità di andare oltre. Il telaio monoscocca in carbonio leggero racchiude geometrie per lunghe distanze, nessuna destinazione sarà troppo distante. Itaca: **oltre il mito.**

Itaca represents the possibility to go further. The lightweight carbon monocoque frame has a long-distance geometry, no destination will be too far away. Itaca: **beyond the myth.**



CARBON - GOLD PINK - SHINY MATT 25



TCM

Continuità della fibra di carbonio, assenza di punti di incollaggio, unico ciclo di cura in autoclave

3K CARBON LOOK

Finitura 3K ottenuta con accurata laminazione artigianale

GEOMETRIE ENDURANCE /LUNGHE DISTANZE

Ottimizzata per le lunghe percorrenze, senza rinunce sulla guidabilità

PASSAGGIO COPERTURE

Fino a 40 mm realmente misurati (consigliato 32 mm) per un migliore comfort, trazione e sicurezza in discesa

ATTACCHI PINZA

Diretti da 160 mm per non utilizzare gli adattatori e pulizia delle linee

VANO PORTA OGGETTI

A chiusura magnetica per una facile apertura in caso di necessità di intervento meccanico

ASTUCCIO "MCIPOLLINI"

Di serie, adatto all'inserimento di multitool, leve per la rimozione della copertura e camera d'aria TPU

COMPATIBILITÀ FULL MOUNT

Compatibilità con i nuovi cambi full mount e con i cambi standard tramite forcellino UDH



TCM

Continuous carbon fiber with no bonding points by a single autoclave cycle

3K CARBON LOOK

3K finish obtained by careful handcrafted lamination

ENDURANCE/LONG DISTANCEGEOMETRIES

Optimized for long distances without compromising handling

TIRE CLEARANCE

Up to 40 mm, measured, (32 mm recommended) for better comfort, traction and safety on descents

DISC BRAKE MOUNTS

Direct 160 mm caliper mounts for avoiding the use of adapters and clean lines

DOWNTUBE STORAGE

Magnetic closure for easy opening in case of need for mechanical intervention

"MCIPOLLINI" CASE

suitable for insertion of multitool, tire levers and TPU tube

FULL MOUNT COMPATIBILITY

Compatibility with new full mount derailleur and standard derailleur via UDH





FIBRA DI LINO

utilizzo di una fibra naturale nella laminazione del reggisella per uno smorzamento delle vibrazioni trasmesse dal terreno al ciclista

DESIGN REGGISELLA

Assorbimento delle irregolarità del terreno, comfort superiore anche dopo ore in sella

FLAX FIBER

In the seatpost lamination, natural fiber is used to dampen vibrations transmitted from the ground to the cyclist

Seatpost design

Absorbs ground irregularities, providing superior comfort even after hours of riding



GREY-DARK GREY-CARBON SHINY/MATT 25



ITACA

///CIPOLLINI



DEEP EMERALD-CARBON-BLACK SHINY/MATT 25



BOND EVO

SPORT

Bond Evo identifica la comodità, senza rinunciare al divertimento. Per allenamenti veloci dopo il lavoro o i giri più impegnativi del fine settimana, questo telaio ti porterà ovunque desideri.

Bond Evo: **comfort e reattività in un unico telaio.**

Bond Evo identifies comfort, without sacrificing fun. For quick workouts after work or harder weekend rides, this frame will get you wherever you want to go.

Bond Evo: **combining comfort and responsiveness into one frame.**

BOND EVO



WHITE PEARL - CARBON - OTTANIO SHINY 23



PASSAGGIO CAVI INTERNO

Massima integrazione per i cablaggi idraulici e elettronici grazie alla serie sterzo da 1 1/2 e alla specifica forcella.

MOVIMENTO CENTRALE BB86

Permette l'assemblaggio diretto delle calotte press-fit del produttore del gruppo senza necessità di adattatori.

PARTE SUPERIORE DEL TELAIO COMFORTEVOLE

Le sezioni del tubo orizzontale e dei forcellini dimensionate per assicurare il corretto comfort.

PARTE INFERIORE DEL TELAIO RIGIDA E REATTIVA


Sezioni tubo obliquo e dei foderi dimensionate per una bicicletta estremamente reattiva.

DOPPIA POSSIBILITÀ DI REGGISELLA

Il posizionamento ideale per garantire una pedalata ottimizzata.

PASSAGGIO COPERTURE FINO A 28 MM

Compatibilità con coperture comfort.

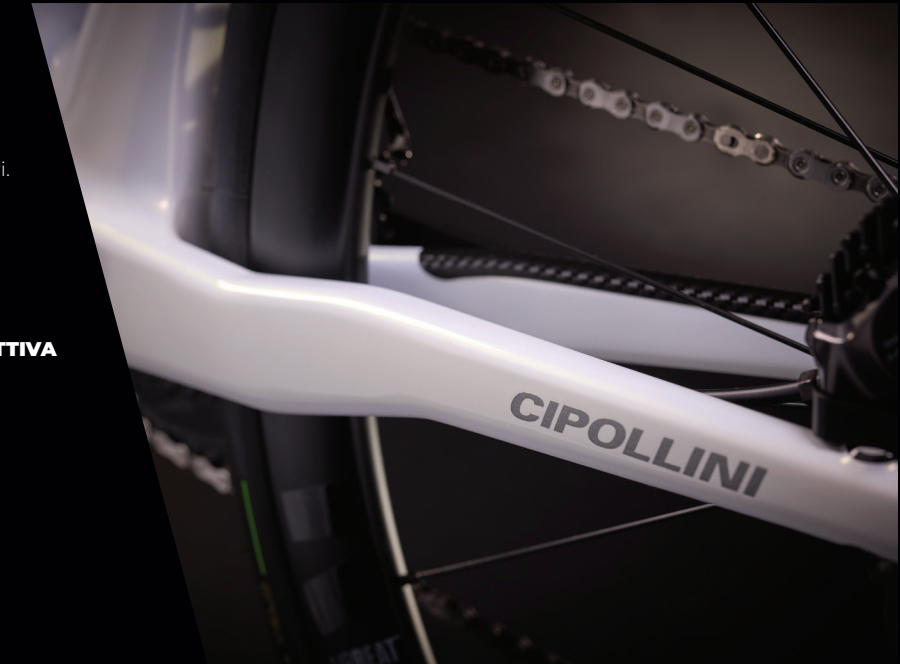

INTERNAL CABLE ROUTING

Maximum integration for hydraulic and electronic wiring harness due to 1 1/2 headset and specific fork.

BB86 BOTTOM BRACKET

Allows direct assembly of the groupset manufacturer's press-fit cups without the need for adapters.

COMFORTABLE UPPER PART OF THE FRAME

Horizontal tube and dropout sections sized to ensure proper comfort.

STIFF AND RESPONSIVE LOWER FRAME SECTION

Down tube and seatstays sections made for an extremely reactive bike.

DUAL SEATPOST OPTION

Down tube and chainstays sections sized to an optimized pedaling.

TIRE CLEARANCE UP TO 28 MM

Compatibility with comfort tires.



BOND EVO



RED CARBON - RED METAL SHINY 23



CARBON - SILVER - RED METAL SHINY 23

AGO

GRAVEL

Ago riassume la tecnologia TCM in un telaio dal passaggio ruota generoso e votato alla stabilità sui sentieri. Il gravel versatile, reattivo e avventuroso, in un unico progetto.

Ago: **il gravel come non lo avete mai vissuto!**

Ago summarizes TCM technology in a frame with generous wheel clearance and devoted to stability on the trails. The versatile, reactive and adventurous gravel, in a single project.

Ago: **gravel like you've never experienced it before!**



RED METAL-ANTHRACITE-ORANGE SHINY 23

PASSAGGIO COPERTURE GENEROSO

Telaio e forcella accettano coperture da 700c con larghezza reale fino a 45 mm (tassellatura inclusa).

KIT PARAFANGHI E PORTAPACCHI OPZIONALE

È possibile acquistare separatamente il kit specifico per permettere di assemblare sulla bicicletta i portapacchi e i parafranghi.

TECNOLOGIA TCM

Il vero telaio monoscocca, permette la perfetta connessione del carro su movimento centrale.

GEOMETRIE E SEZIONI COMFORT

Il carro da 427 mm e le sezioni del telaio garantiscono di poter percorrere lunghi tratti nel massimo comfort.

DIMENSIONI GENEROSE TRA TUBO SELLA E MOVIMENTO CENTRALE

Queste sezioni garantiscono il contrasto delle deformazioni in fase di pedalata oltre a migliorare l'equilibrio e la stabilità in discesa e sui tratti sconnessi.

TUBO SELLA AVANZATO DI 5 MM

Questa soluzione progettuale permette l'ampio passaggio delle coperture senza allungare eccessivamente la quota del carro posteriore.

LARGE TIRE CLEARANCE

Frame and fork accept 700c tires with actual width up to 45 mm.

OPTIONAL FENDER AND LUGGAGE RACK KIT

The specific kit can be purchased separately to allow luggage racks and fenders to be assembled on the bicycle.

TCM TECHNOLOGY

The true monocoque frame, allows perfect connection of the rear triangle on bottom bracket.

COMFORTABLE GEOMETRIES AND SECTIONS

The 427mm rear triangle and frame sections ensure you can ride long routes in a comfy way.

GENEROUS DIMENSIONS BETWEEN SEAT TUBE AND BOTTOM BRACKET

These sections ensure counteracting deformation when pedaling as well as improving balance and stability when descending on bumpy sections.

SEAT TUBE ADVANCED BY 5 MM

This design solution allows the wide passage of the tires without excessively lengthening the height of the rear triangle.

AGO



CARBON-WHITE PEARL-COBALT BLUE MATT 23



SAND-GREEN-RED SHINY 23

NKTT

TIME TRIAL

NKTT è pura aerodinamica. Grazie allo sviluppo in galleria del vento del telaio e dei componenti principali, restituisce la massima efficienza contro il cronometro.

NKTT: **guidabilità e indiscussa aerodinamica per eccellere in triathlon e cronometro.**

NKTT is pure aerodynamics. Thanks to the wind tunnel development of the frame and main components, it returns maximum efficiency against the clock.

NKTT: **handling and undisputed aerodynamics to excel in triathlon and time trial.**



CARBON - GREY - BLUE WATER SHINY 21



AERODINAMICA ECCEZIONALE

Aerodinamica del telaio sviluppata in galleria del vento.

GUIDABILITÀ IN CONDIZIONI DI VENTO

Telaio ideale per tracciati a cronometro e triathlon con condizioni ventose grazie alla sua elevata guidabilità.

ATTACCO MANUBRIO CIPOLLINI

Attacco manubrio full carbon interamente realizzato in MCipollini per ospitare internamente la Junction box.

FORCELLA E SCOCCA AERODINAMICHE

La scocca si integra all'attacco manubrio garantendo la massima aerodinamica e design accattivante.

SEZIONI DEL TELAIO EXTRARIGIDE

Il telaio, con tecnologia TCM è estremamente rigido grazie alle importanti sezioni su tubo obliquo, movimento centrale e tubo sella.

BICI E COMPONENTI TESTATI IN GALLERIA DEL VENTO

Bicicletta e componenti piu' performanti testati in galleria del vento per la massima efficienza a Cronometro.



EXCEPTIONAL AERODYNAMIC

Frame aerodynamics developed in the wind tunnel.

STEERABILITY

Ideal frame for time trials, triathlons and windy conditions thanks to its high handling.

MCIPOLLINI HANDLEBAR STEM

Full-carbon handlebar stem manufactured by MCipollini with integrated junction box.

AERODYNAMIC FORK AND HEAD TUBE

Highly integrated frame and fork for the most efficient aerodynamics and a slick design.

EXTRA STIFF FRAME SECTIONS

High-stiffness TCM frame thanks to increased sections of the down tube, bottom bracket and seat tube.

BIKE AND COMPONENTS TESTED IN THE WIND TUNNEL

Bike and components tested in the wind tunnel for maximum aerodynamic efficiency in time trials.





CARBON - GREY - RED SHINY 21



CARBON MATT-GREY MATT-CHROME SHINY 21



NKTR

TRACK

NKTR è disegnata esclusivamente per le gare su pista, enfatizzando le prestazioni con rigidità e potenza.
NKTR: **per tradurre tutta la potenza in vittoria.**

NKTR is designed exclusively for track racing, emphasizing performance with stiffness and power.
NKTR: **to translate all the power into victory.**



CARBON - BISCAY BAY - SILVER SHINY 22



TELAIO
T1000 alto modulo, finitura 1k. Elementi meccanizzazione (forcellini, expander, bloccaggio reggisella, clamp) made in Italy.

FORCELLA AERO
Per prestazioni migliori e sterzo reattivo.


ATTACCO MANUBRIO IN ERGAL
Progettato per passaggio cavi interno.

ECCEZIONALE AERODINAMICA
Meno resistenza, miglior efficienza.

ATOMLINK SYSTEM
Triangolo monoscocca con carro incollato.

BSA
34,7 mm X 24 TPI bottom bracket.

CNC COMPONENTI
Realizzato in ergal/acciaio inox per una maggiore resistenza strutturale e affidabilità.

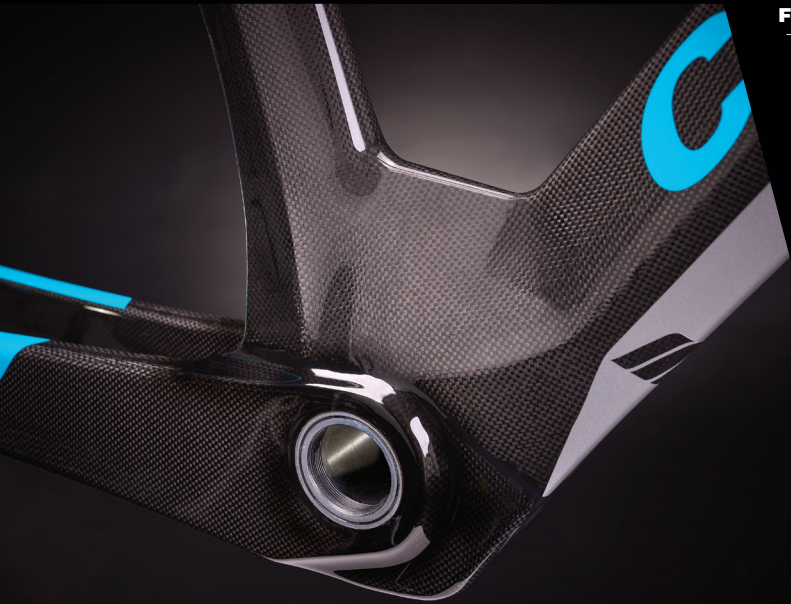

FRAME
T1000 high modulus, monocoque frame, 1K finish. Mechanical components (derailleur hangers, expander bolts, seat post clamps) made in Italy.

AERO FORK
For higher performance and enhanced reactivity.

ERGAL HANDLEBAR STEM
Designed for internal cable routing.

EXCEPTIONAL AERODYNAMICS
Less resistance, more efficiency.

BSA
34,7 mm X 24 TPI bottom bracket.

ATOMLINK SYSTEM
Monocoque triangle with glued cart.

CNC COMPONENTS
Made of ergal/stainless steel for enhanced structural resistance and reliability.





SPEED

TRACK

Speed è il telaio da pista definitivo.
Offre il meglio della prestazione
senza compromessi, la rigidità
qui è ai massimi livelli.
Speed: **più veloce che mai.**

Speed is the ultimate track frame.
It offers the best performance without
compromises, the rigidity here
is at the highest levels.
Speed: **faster than ever.**

SPEED



CARBON-ANTHRACITE-RED SHINY 22

CIPOLLINI



TELAIO

T1000 alto modulo, finitura 1k. Elementi meccanizzazione (forcellini, expander, bloccaggio reggisella, clamp) made in Italy.

FORCELLA AERO

Con headset conico per prestazioni migliori e sterzo reattivo.

2 VARIANTI DI TELAIO

Sterzo normale, sterzo ribassato.

COMPONENTI CNC

Realizzato in ergal/acciaio inox per una maggiore resistenza strutturale e affidabilità.

ECCEZIONALE AERODINAMICA

Meno resistenza, miglior efficienza.

BSA 34,7 MM X 24 TPI

Bottom bracket con 2 altezze da terra: 287mm oppure 275 mm.



FRAME

T1000 high modulus, monocoque frame, 1K finish. Mechanical components (dropouts, expander bolts, seat post clamps) made in Italy.

AERO FORK

With a tapered headset for higher performance and enhanced reactivity.

2 FRAME VERSIONS

Normal headset lowered headset.

CNC COMPONENTS

Made of ergal/stainless steel for enhanced structural resistance and reliability.

EXCEPTIONAL AERODYNAMICS

Less resistance, more efficiency.

BSA 34,7 MM X 24 TPI

Bottom bracket with 2 heights above the ground: 287 mm or 275 mm.





L'elettrico non può essere più confinato al futuro, è il presente. La nostra gamma di biciclette a pedalata assistita è pensata per soddisfare le esigenze di tutti i ciclisti, senza mai rinunciare al piacere di guida. Hai poco tempo a disposizione o una salita ti sembra troppo impegnativa? Con le nostre biciclette a pedalata assistita troverai sempre la soluzione giusta.

Electric can no longer be confined to the future, it is the present. Our range of electric bicycles is designed to meet the needs of all cyclists, without ever giving up the pleasure of riding. Do you have a lack of time available or does a climb seem too demanding? With our electric bicycles, you will always find the right solution.



FLUSSO



FYBRA R



FYBRA GX



FLUSSO

LIGHT E-ROAD

Flusso permette di essere pedalata come una bici muscolare, con la possibilità di avere un aiuto quando serve. Grazie al suo peso incredibilmente ridotto ed al telaio TCM, non sembrerà di essere in sella ad una bicicletta a pedalata assistita.

Flusso: **la bici a pedalata assistita che si comporta come una muscolare.**

Flusso allows to be pedaled like a muscular-powered bike, with the possibility of having help when needed. Thanks to its incredibly low weight and the TCM frame, it won't feel like you're riding a pedal-assisted bicycle.

Flusso: **the pedal-assisted bike that behaves like a muscular-powered bike.**

myMCIPO

CUSTOMIZABLE ON MCIPOLLINI.COM

FLUSSO



GREY NARDO' - CARBON SHINY 22

MCIPOLLINI E-WORLD



TECNOLOGIA TCM

Il vero telaio monoscocca, permette la perfetta connessione del carro su movimento centrale.

L'AIUTO CHE NON SI SOSTITUISCE AL CICLISTA

MCipollini Flusso ti permette di pedalare con i tuoi amici più allenati godendoti pienamente la soddisfazione di una scalata fatta con le tue gambe.

BILANCIAMENTO DEI PESI OTTIMIZZATO

Guidabilità in discesa pari ad una bicicletta muscolare ed elevata reattività in pianura.

1 X READY

Cover che tutela l'estetica della bicicletta anche per chi vuole un montaggio più user friendly con monocorona.

LEGGEREZZA

Flusso ha un peso record tra le e-bike: 11,3 kg in taglia M con il montaggio alta gamma.

DESIGN DA MUSCOLARE

Le ridotte dimensioni del tubo obliquo e la pulizia del sistema sensore di velocità - magnete danno un design da muscolare.



TCM TECHNOLOGY

True monocoque frame, allows perfect connection of the rear triangle on bottom bracket.

THE SUPPORT THAT DOESN'T REPLACE THE CYCLIST

MCipollini Flusso allows you to pedal with your most trained friends while fully enjoying the satisfaction of a climb ridden with your own legs.

OPTIMIZED WEIGHT BALANCE

Downhill rideability equal to a muscle bike and high responsiveness on the flat surfaces.

1 X READY

Cover that protects the aesthetics of the bike even for those who want a more user friendly mount with 1X chainring.

LIGHTNESS

Flusso has a record weight among e-bikes: 11.3 kg in size M with the high-end configuration.

TRADITIONAL ROAD BIKE DESIGN

Small downtube size and clean speed sensor-magnet system Keep the design like a traditional road bike.



FLUSSO



CARBON - YELLOW SHINY 22



DEEP OCEAN - CARBON MATT 22

FYBRA R

POWER E-ROAD

Fybra R sintetizza prestazione e versatilità. Grazie al telaio TCM, alla batteria ad alta capacità, luci integrate e passaggio ruota generoso, potrai affrontare qualsiasi pedalata. Fybra R: **possibilità senza limiti.**

Fybra R synthesizes performance and versatility. Thanks to TCM frame, the high-capacity battery, integrated lights and generous wheel clearance, you can tackle any ride. Fybra R: **limitless possibilities.**

FYBRA R



CARBON - WHITE PEARL - SILVER SHINY 23

CIPOLLINI E-WORLD



TELAIO MONOSCOCCA CON TECNOLOGIA TCM

La tecnologia TCM permette continuità nelle fibre di carbonio, raggiungendo gli obiettivi di comfort e guidabilità.

INTEGRAZIONE TOTALE

Pulizia delle linee grazie al passaggio cavi interno, integrazione display e faro nell'attacco manubrio, ed integrazione sensore di velocità e magnete.

SISTEMA POLINI EP3+ EVO CON BATTERIA DA 500 WH

Potenza e coppia ai vertici della categoria, strumentazione completa di display a colori e misuratore di potenza. La batteria garantisce fino a 220 km di autonomia.

AMPIO PASSAGGIO RUOTE

La luce per coperture fino a 47 mm effettivi garantisce comfort e guidabilità nelle lunghe giornate in sella.

LUCI POSTERIORE INTEGRATA E FARO ANTERIORE DA 550 LUMEN

La luce posteriore integrata nel telaio e il potente faro anteriore, illuminano anche la strada più scura in modalità abbagliante, e permettono di pedalare in sicurezza in modalità anabbagliante.

LOCALIZZATORE GPS INTEGRATO, PREDISPOSIZIONE PER BIKEPACKING

Il tracker autoalimentato e nascosto nel telaio permette anche la protezione da furti. Compatibilità con portapacchi posteriore e parafranghi opzionali.



MONOCOQUE FRAME WITH TCM TECHNOLOGY

TCM technology enables continuity in carbon fibres, achieving the goals of comfort and rideability.

TOTAL INTEGRATION

Achieving clean lines through internal cable routing, integrated display and headlight in stem clamp, and integrated speed sensor and magnet.

EP3+ EVO POLINI SYSTEM WITH 500 WH BATTERY

Power and high torque at the highest level of category, color display and power meter, and long battery capacity for up to 220 km of range.

WIDE TYRE CLEARANCE

Tyres up to 47 mm as measured on 700C wheels, which allows cyclists to tackle even the most extreme routes.

INTEGRATED REAR LIGHTS AND 550-LUMEN FRONT LIGHT

The frame-integrated rear light and powerful headlamp, illuminate even the darkest road in high beam mode, and allow safe pedaling in low beam mode.

INTEGRATED GPS TRACKER, BIKEPACKING READY

Self-powered tracker hidden in frame allows protection from theft. Compatibility with optional Rear pannier rack and fenders.



FYBRA R



SAND - GREEN - ANTHRACITE SHINY 23



FYBRA GX

E-GRAVEL

Fybra GX è libertà. La libertà di andare ovunque, grazie alla elevata capacità della batteria che permette di coprire lunghe distanze, ed il passaggio ruota generoso, ai vertici della categoria.

Fybra GX: **l'elettrico al servizio delle tue uscite in gravel.**

Fybra GX is freedom. The freedom to go anywhere, thanks to the high capacity of the battery which allows you to cover long distances, and the generous wheel clearance, at the top of the category.

Fybra GX: **the electric bike at the service of your gravel adventures.**

FYBRA GX



SAND - GREEN - ANTHRACITE SHINY 23

CIPOLLINI E-WORLD



TELAIO MONOSCOCCA CON TECNOLOGIA TCM

La tecnologia TCM permette continuità nelle fibre di carbonio, raggiungendo gli obiettivi di comfort e guidabilità.

INTEGRAZIONE TOTALE

Massima pulizia delle linee grazie all'integrazione di sospensione, passaggio cavi nel telaio, display e faro nell'attacco manubrio, sensore di velocità e magnete.

SISTEMA POLINI EP3+ EVO CON BATTERIA DA 500 WH

Potenza e coppia ai vertici della categoria, display a colori e misuratore di potenza, fino a 165 km di autonomia.

SOSPENSIONE INTEGRATA CON FORCELLA 160/180 MOUNT

La sospensione integrata nel design, le coperture record per il segmento e l'ottimizzazione dell'attacco pinza per dischi specifici off-road, permettono di affrontare anche i percorsi più estremi.

LUCI POSTERIORE E FARO ANTERIORE DA 550 LUMEN

La luce posteriore integrata e il potente faro anteriore, illuminano anche la strada più scura in modalità abbagliante, e permettono di pedalare in sicurezza in modalità anabbagliante.

LOCALIZZATORE GPS INTEGRATO, PREDISPOSIZIONE PER PORTA PACCHI

Il tracker autoalimentato e nascosto nel telaio permette anche la protezione da furti. Compatibilità con portapacchi posteriore e parafanghi opzionali.



MONOCOQUE FRAME WITH TCM TECHNOLOGY

TCM technology enables continuity in carbon fibres, achieving the goals of comfort and ridability.

TOTAL INTEGRATION

Achieving clean lines through internal cable routing, the integration of suspension, display and headlight in the stem clamp, integrated speed sensor and magnet.

EP3+ EVO POLINI SYSTEM WITH 500 WH BATTERY

Power and high torque at the highest level of category, colour display and power meter, and long battery capacity for up to 165 km of range.

INTEGRATED SUSPENSION AND 160/180 MOUNT FORK

Suspension integrated into the design, record-breaking tyres for the segment and optimization of the caliper mount for specific off-road disc diameters, to tackle even the most extreme trails.

INTEGRATED REAR AND 550-LUMEN FRONT LIGHT

The frame-integrated rear light and powerful headlamp, illuminate even the darkest path in high beam mode, and allow safe pedaling on the road in low beam mode.

INTEGRATED GPS TRACKER, BIKEPACKING READY

Self-powered tracker hidden in frame also allows protection from theft. Compatibility with optional pannier racks and fenders.



FYBRA GX

CIPOLLINI E-WORLD




CARBON - WHITE PEARL - SILVER SHINY 23



Componenti / Components

BOTTOM BRACKET	PRESSFIT 46 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 0 mm; 130 g. Optional: OFFSET 12 mm
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	25 mm
FRAME WEIGHT	1.010 g
FORK WEIGHT	390 g
MAXIMUM TIRE	29 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	reach	stack
XS	454	527	510	74,6°	71,1°	105	45	570	410	72	370	508
S	473	542	527	74,2°	72,0°	116	45	577	410	72	379	522
M	494	555	545	73,8°	72,5°	126	45	587	410	72	390	533
L	512	570	560	73,5°	72,8°	141	45	597	410	70	398	546
XL	528	589	575	73,3°	73,4°	159	45	604	410	68	406	564
XXL	545	611	590	72,8°	73,7°	179	45	611	410	68	410	583

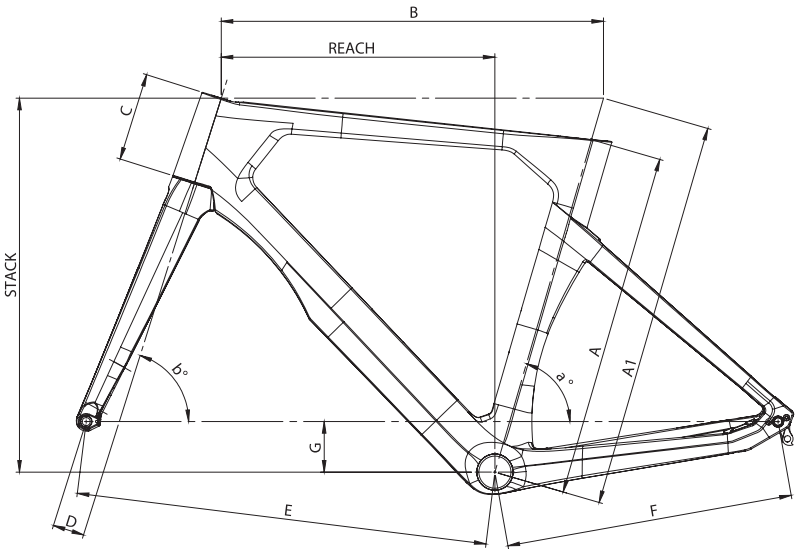

TELAIO FRAME	TELAIO FRAME	P30CL	P30BL
	FORCELLA FORK	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	Shimano Dura-Ace Di2 12s R9250
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	Shimano Dura-Ace Di2 R9250
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270	Shimano Dura-Ace Di2 R9270
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200P 11-34 12s	Shimano Dura-Ace R9200P 11-34 12s
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	Shimano Pressfit BB92-41B
	ROTORI ROTOR	Shimano RTCL900 160 mm	Shimano RTCL900 160 mm
	CATENA CHAIN	Shimano M9100 12s	Shimano M9100 12s
RUOTE WHEELS	ANTERIORE FRONT	Lightweight Obermayer EVO	Campagnolo BORA WTO 60 C23
	POSTERIORE REAR		
COPERTURE TIRES		Pirelli P Zero Race TLR 26-622	Pirelli P Zero Race TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	Vision HB Metron 5D ACR 3K (XS/S: 100x400 mm, M: 110x420 mm, L: 120x420 mm, XL/XXL: 130x440 mm; c-c)	Vision HB Metron 5D ACR 3K (XS/S: 100x400 mm, M: 110x420 mm, L: 120x420 mm, XL/XXL: 130x440 mm; c-c)
	MANUBRIO HANDLEBAR		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia SLR Boost Superflow Carbon Kit	Selle Italia SLR Boost Superflow Carbon Kit
	REGGISELLA SEATPOST	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		7,260 KG	7,435 KG


		Q30MP	O50DP
TELAIO FRAME	TELAIO FRAME	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
	FORCELLA FORK	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Ultegra Di2 12s R8150	SRAM RIVAL E-TAP AXS D1
	DERAGLIATORE DERAILLEUR	Shimano Ultegra Di2 R8150	-
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Ultegra, ST-R8170, BR-R8170	SRAM RIVAL E-TAP AXS DICS Flat Mount
	PACCO PIGNONI CASSETTE	Shimano Ultegra 12s R8100 11-34	SRAM XG-1250 D1 X-Glide 10-36, 12s
	GUARNITURA CRANK SET	Shimano Ultegra Power meter R8100-P 52/36 (XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)	SRAM RIVAL D1 DUB 46T (XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB72	SRAM DUB BB386 ROAD WIDE
	ROTORI ROTOR	Shimano RTCL800 160 mm	SRAM Paceline Road Centerlock Black 160 mm
	CATENA CHAIN	Shimano M8100 12s	SRAM PC RIVAL D1, 12s
RUOTE WHEELS	ANTERIORE FRONT	Fulcrum AIRBEAT 400 DB 21 2WF-R AFS	Fulcrum Racing 400 DB
	POSTERIORE REAR		
COPERTURE TIRES		Pirelli Cinturato Velo TLR 28-622	Pirelli Cinturato Velo TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL/XXL: 130 mm)	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL/XXL: 130 mm)
	MANUBRIO HANDLEBAR	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL/XXL: 440 mm; c-c)	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL/XXL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia Model X Superflow	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		8,100 KG	8,450 KG

		Kit telaio + manubrio Frame kit + handlebar	Kit telaio Frame Kit
TELAIO FRAME	TELAIO FRAME	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
	FORCELLA FORK	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	-	-
	DERAGLIATORE DERAILLEUR	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	-	-
	PACCO PIGNONI CASSETTE	-	-
	GUARNITURA CRANK SET	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	-	-
	ROTORI ROTOR	-	-
	CATENA CHAIN	-	-
RUOTE WHEELS	ANTERIORE FRONT	-	-
	POSTERIORE REAR		
COPERTURE TIRES		-	-
COCKPIT	ATTACCO MANUBRIO STEM	Vision HB Metron 5D ACR 3K (XS/S: 100x400 mm, M: 110x420 mm, L: 120x420 mm, XL/XXL: 130x440 mm; c-c)	-
	MANUBRIO HANDLEBAR		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	-	-
	REGGISELLA SEATPOST	MCipollini RB1K AD.ONE	MCipollini RB1K AD.ONE
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	-	-

Componenti / Components

BOTTOM BRACKET	PRESSFIT 41 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 18 mm; 140 g. Optional: OFFSET 0 mm
BRAKE SYSTEM	DIRECT MOUNT; DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	25 mm
FRAME WEIGHT	1.160 g
FORK WEIGHT	430 g
MAXIMUM TIRE	29 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
XXS	430	510	508	75,0°	71,0°	93	45	573	410	71	368	375	493
XS	450	519	520	74,8°	71,5°	99	45	579	410	71	368	383	500
S	430	528	532	74,5°	72,0°	106	45	584	410	71	368	391	509
M	450	540	545	74,0°	72,5°	115	45	589	410	71	368	396	519
L	480	561	559	73,8°	73,0°	134	45	597	410	70	368	402	538
XL	515	576	575	73,5°	73,3°	149	45	608	410	69	368	411	552
XXL	550	595	591	73,0°	73,5°	169	45	616	410	67	368	417	569

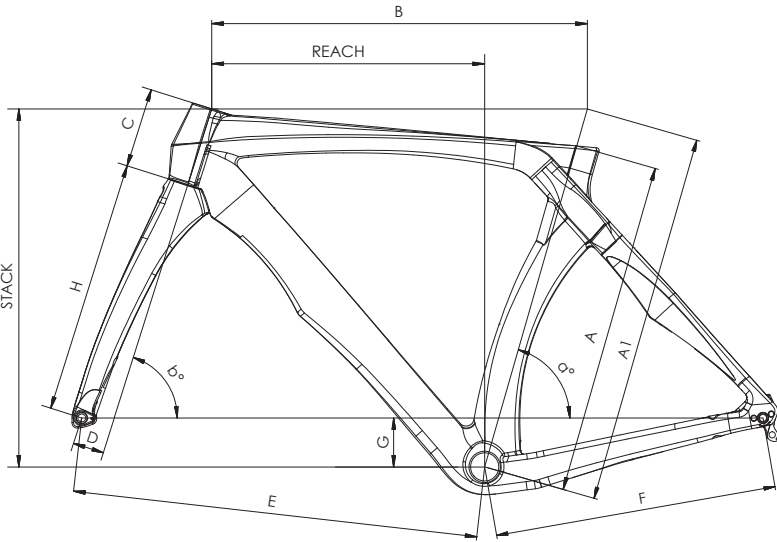

		P30BL	Q30MP
TELAIO FRAME	TELAIO FRAME	MCipollini RB1K The One DB	MCipollini RB1K The One DB
	FORCELLA FORK	MCipollini RB1K The One DB	MCipollini RB1K The One DB
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	Shimano Ultegra Di2 12s R8150
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	Shimano Ultegra Di2 R8150
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270	Shimano Ultegra, ST-R8170, BR-R8170
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s	Shimano Ultegra 12s R8100 11-34
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XXS/XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)	Shimano Ultegra Power meter R8100-P 52/36 (XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	Shimano Pressfit BB72
	ROTORI ROTOR	Shimano RTCL900 160 mm	Shimano RTCL800 160 mm
	CATENA CHAIN	Shimano M9100 12s	Shimano M8100 12s
RUOTE WHEELS	ANTERIORE FRONT POSTERIORE REAR	Campagnolo BORA WTO 60 C23	Fulcrum AIRBEAT 400 DB 21 2WF
COPERTURE TIRES		Pirelli P Zero Race TLR 28-622	Pirelli Cinturato Velo TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	Vision HB Metron 5D ACR 3K (XXS/XS/S: 100x400 mm, M: 110x420 mm, L: 120x420 mm, XL/XXL: 130x440 mm; c-c)	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL/XXL: 130 mm)
	MANUBRIO HANDLEBAR		Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL/XXL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia SLR Boost Superflow Carbon Kit	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini RB1K The One DB	MCipollini RB1K The One DB
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		7,785 KG	8,730 KG

RB1K THE ONE


		O30DP	Kit telaio + manubrio Frame kit + handlebar	Kit telaio Frame Kit
TELAIO FRAME	TELAIO FRAME	MCipollini RB1K The One DB	MCipollini RB1K The One DB	MCipollini RB1K The One DB
	FORCELLA FORK	MCipollini RB1K The One DB	MCipollini RB1K The One DB	MCipollini RB1K The One DB
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	SRAM RIVAL E-TAP AXS D1 Glossy Black Max 36 denti (10-30 /10-36)	-	-
	DERAGLIATORE DERAILLEUR	SRAM RIVAL E-TAP AXS D1 a saldare Glossy Black	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	SRAM RIVAL E-TAP AXS DICS anteriore Flat Mount F20	-	-
	PACCO PIGNONI CASSETTE	SRAM XG-1250 D1 X-Glide 10-36, 12 s	-	-
	GUARNITURA CRANK SET	SRAM RIVAL D1 48-35 DUB (XXS/XS/S: 170 mm, M/L: 172,5 mm, XL/XXL: 175 mm)	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	SRAM DUB ROAD Press Fit 86,5 x 41 mm	-	-
	ROTORI ROTOR	SRAM Paceline Road Centerlock Black 160 mm	-	-
	CATENA CHAIN	SRAM PC RIVAL D1, 12s	-	-
RUOTE WHEELS	ANTERIORE FRONT	Fulcrum Racing 400 DB	-	-
	POSTERIORE REAR			
COPERTURE TIRES		Pirelli Cinturato Velo TLR 28-622	-	-
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL/XXL: 130 mm)	Vision HB Metron 5D ACR 3K (XS/S: 100x400 mm, M: 110x420 mm, L: 120x420 mm, XL/XXL: 130x440 mm; c-c)	-
	MANUBRIO HANDLEBAR	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL/XXL: 440 mm; c-c)		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia Model X Superflow	-	-
	REGGISELLA SEATPOST	MCipollini RB1K The One DB	MCipollini RB1K The One DB	MCipollini RB1K The One DB
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	-	-
PESO BICI BIKE WEIGHT		8,800 KG	-	-



Componenti / Components

BOTTOM BRACKET	PRESSFIT 41 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 10 mm; 100 g.
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	780 g
FORK WEIGHT	370 g
MAXIMUM TIRE	29 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	reach	stack
XS	429	526	506	74,7°	70,8°	108	45	571	410	71	367	507
S	450	545	524	74,3°	71,4°	124	45	581	410	71	377	524
M	479	571	539	73,9°	72,2°	136	45	585	410	71	304	539
L	514	584	564	73,4°	72,7°	159	45	601	410	69	397	560
XL	549	611	580	73,2°	73,3°	184	45	609	410	68	403	585

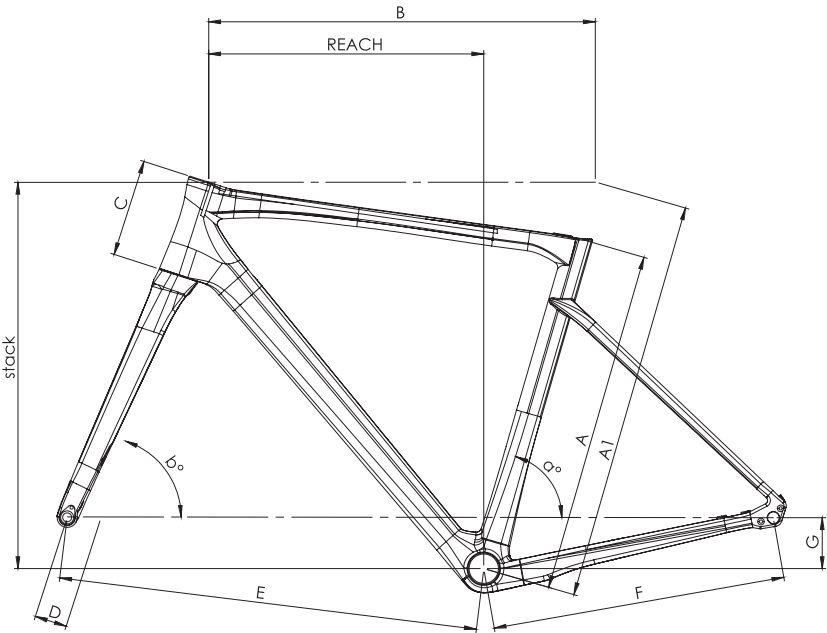

TELAIO FRAME	P30UC		P30BC	
	TELAIO FRAME	MCipollini Dolomia	TELAIO FRAME	MCipollini Dolomia
TRASMISSIONE TRANSMISSION	FORCELLA FORK	MCipollini Dolomia	FORCELLA FORK	MCipollini Dolomia
	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B
	ROTORI ROTOR	Shimano RTCL900 160 mm	ROTORI ROTOR	Shimano RTCL900 160 mm
	CATENA CHAIN	Shimano M9100 12s	CATENA CHAIN	Shimano M9100 12s
RUOTE WHEELS		Tune Schwarzbrenner 20 Skyline Disc	RUOTE WHEELS	Campagnolo BORA WTO 60 C23
COPERTURE TIRES		Pirelli P Zero Race TLR 28	COPERTURE TIRES	Pirelli P Zero Race TLR 28
COCKPIT	ATTACCO MANUBRIO STEM	Deda Alanera (XS: 90x420 mm, S: 100x440 mm, M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)		Deda Alanera (XS: 90x420 mm, S: 100x440 mm, M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)
	MANUBRIO HANDLEBAR			
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	San Marco Shortfit Superleggera Wide		San Marco Shortfit Superleggera Wide
	REGGISELLA SEATPOST	MCipollini Dolomia		MCipollini Dolomia
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	ACCESSORI ACCESSORIES	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		6,550 KG	PESO BICI BIKE WEIGHT	6,845 KG


		Q30MP	O30DP
TELAIO FRAME	TELAIO FRAME	MCipollini Dolomia	MCipollini Dolomia
	FORCELLA FORK	MCipollini Dolomia	MCipollini Dolomia
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Ultegra Di2 12s R8150	SRAM RIVAL E-TAP AXS D1
	DERAGLIATORE DERAILLEUR	Shimano Ultegra Di2 R8150	SRAM RIVAL E-TAP AXS D1
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Ultegra, ST-R8170(R), BR-R8170(R)	SRAM RIVAL E-TAP AXS Flat Mount
	PACCO PIGNONI CASSETTE	Shimano Ultegra 12s R8100 11-34	SRAM XG-1250 D1 X-Glide 10-36, 12 s
	GUARNITURA CRANK SET	Shimano Ultegra Power meter R8100-P 52/36 (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	SRAM RIVAL D1 48-35 DUB (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB72	SRAM DUB ROAD Press Fit
	ROTORI ROTOR	Shimano RTCL800 160 mm	SRAM Paceline Road Centerlock Black 160 mm
	CATENA CHAIN	Shimano M8100 12s	SRAM PC RIVAL D1, 12 s
RUOTE WHEELS		Fulcrum AIRBEAT 400 DB 21 2WF-R AFS	Fulcrum Racing 400 DB
COPERTURE TIRES		Pirelli Cinturato Velo TLR 28-622	Pirelli Cinturato Velo TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)	FSA ST ROAD NS ACR alloy -6° (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)
	MANUBRIO HANDLEBAR	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia Model X Superflow	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini Dolomia	MCipollini Dolomia
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		7,800 KG	8,210 KG

		Kit telaio + manubrio Frame kit + handlebar	Kit telaio Frame Kit
TELAIO FRAME	TELAIO FRAME	MCipollini Dolomia	MCipollini Dolomia
	FORCELLA FORK	MCipollini Dolomia	MCipollini Dolomia
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	-	-
	DERAGLIATORE DERAILLEUR	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	-	-
	PACCO PIGNONI CASSETTE	-	-
	GUARNITURA CRANK SET	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	-	-
	ROTORI ROTOR	-	-
	CATENA CHAIN	-	-
RUOTE WHEELS		-	-
COPERTURE TIRES		-	-
COCKPIT	ATTACCO MANUBRIO STEM	Deda Alanera (XS: 90x420 mm, S: 100x440 mm, M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	-
	MANUBRIO HANDLEBAR		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	-	-
	REGGISELLA SEATPOST	MCipollini Dolomia	MCipollini Dolomia
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	-	-

Componenti / Components

BOTTOM BRACKET	PRESSFIT 41 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	FLAX TECH, OFFSET 10 mm; 110 g. Optional: Dolomia seatpost
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
FRONT REAR CALIPER MOUNT THICKNESS	25 mm
FRAME WEIGHT	970 g
FORK WEIGHT	480 g (aluminum dropout included)
MAXIMUM TIRE	40 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	reach	stack
XS	435	541	510	74,7°	71,3°	104	48	574	415	77	367	522
S	452	562	528	74,2°	71,8°	122	48	583	415	77	375	541
M	477	590	548	73,7°	72,3°	150	48	594	415	75	382	567
L	497	615	563	73,7°	72,3°	174	48	609	415	75	390	590
XL	530	642	586	73,2°	72,5°	202	48	626	415	72,5	400	615

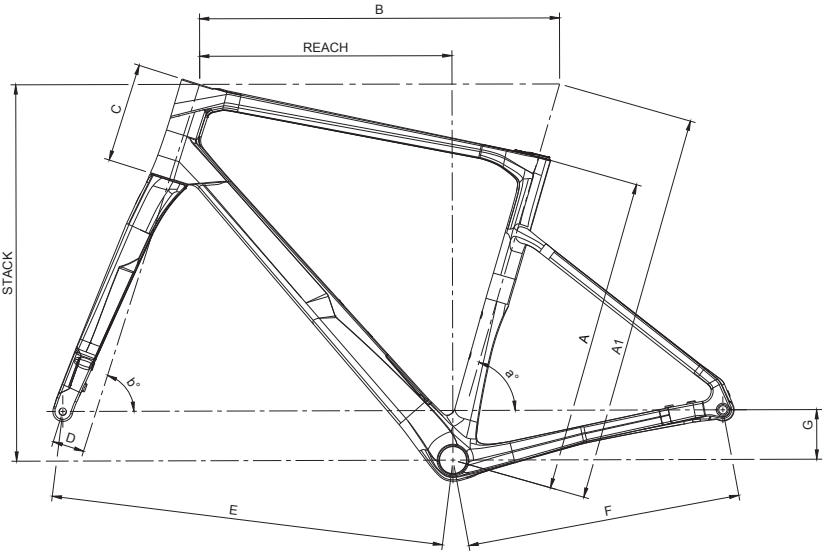

TELAIO FRAME	TELAIO FRAME	P30RQ	U30XQ
		MCipollini Itaca	MCipollini Itaca
TRASMISSIONE TRANSMISSION	FORCELLA FORK	MCipollini Itaca	MCipollini Itaca
	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	SRAM RED XPLR AXS E1
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	-
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270	SRAM ED RED AXS E1 SJD
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s	SRAM XG 1391 E1 XPLR 10-46
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	SRAM RED 1 POWERMETER XPLR DUB WIDE 46 (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	SRAM DUB PF 86.5 ROAD WIDE
	ROTORI ROTOR	Shimano RTCL900 160 mm	SRAM ROTOR PACELINE X CNTRLOCK 160 ROUNDED
	CATENA CHAIN	Shimano M9100 12s	SRAM CN Rival
RUOTE WHEELS		Campagnolo BORA WTO 45 2WF C23	Tune Schwarzbrenner 20 Skyline Disc
COPERTURE TIRES		Pirelli P Zero Road TLR 32	Pirelli P Zero Road TLR 32
COCKPIT	ATTACCO MANUBRIO STEM	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)
	MANUBRIO HANDLEBAR		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia SLR BOOST KIT CARBON SUPER FLOW L	Selle Italia SLR BOOST KIT CARBON SUPER FLOW L
	REGGISELLA SEATPOST	MCipollini Itaca	MCipollini Itaca
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		7,450 KG	7,130 KG


		Q30TP	O31CP	Kit telaio + manubrio Frame kit + handlebar	Kit telaio Frame Kit
TELAIO FRAME	TELAIO FRAME	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca
	FORCELLA FORK	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Ultegra Di2 12s R8150	SRAM RIVAL E-TAP AXS D1	-	-
	DERAGLIATORE DERAILLEUR	Shimano Ultegra Di2 R8150	SRAM RIVAL E-TAP AXS D1	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Ultegra Di2 R8170	SRAM RIVAL E-TAP AXS	-	-
	PACCO PIGNONI CASSETTE	Shimano Ultegra 12s R8100 11-34	SRAM XG-1250 D1 X-Glide 10-36, 12 s	-	-
	GUARNITURA CRANK SET	Shimano Ultegra Power meter R8100-P 52/36 (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	SRAM RIVAL D1 48-35 DUB (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB72	SRAM DUB ROAD Press Fit	-	-
	ROTORI ROTOR	Shimano RTCL800 160 mm	SRAM Paceline Road Centerlock Black 160 mm	-	-
	CATENA CHAIN	Shimano M8100 12s	SRAM PC RIVAL D1, 12 s	-	-
RUOTE WHEELS	ANTERIORE FRONT	Fulcrum AIRBEAT 400 2WF-R	Tune TSR22	-	-
	POSTERIORE REAR				
COPERTURE TIRES		Pirelli P Zero Road TLR 32	Pirelli P Zero Road TLR 32	-	-
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)	FSA ST ROAD NS ACR alloy -6° (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	-
	MANUBRIO HANDLEBAR	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia Model X Superflow	Selle Italia Model X Superflow	-	-
	REGGISELLA SEATPOST	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca	MCipollini Itaca
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair	-	-
PESO BICI BIKE WEIGHT		8,395 KG	8,190 KG	-	-



Componenti / Components

BOTTOM BRACKET	PRESSFIT 41 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 15 mm; 130 g. Optional: OFFSET 0 mm
BRAKE SYSTEM	CALIPER; DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	1.020 g
FORK WEIGHT	420 g
MAXIMUM TIRE	28 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
XS	430	525	507	74,6°	70,8°	108	45	570	410	71	368	367,5	507
S	450	545	524	74,4°	71,4°	124	45	581	410	71	368	377	524
M	480	560	540	74,0°	72,0°	136	45	584	410	71	368	382,5	538
L	515	582	565	73,5°	72,5°	159	45	601	410	69	368	397	560
XL	550	610	583	73,0°	73,2°	183	45	609	410	68	368	403	584

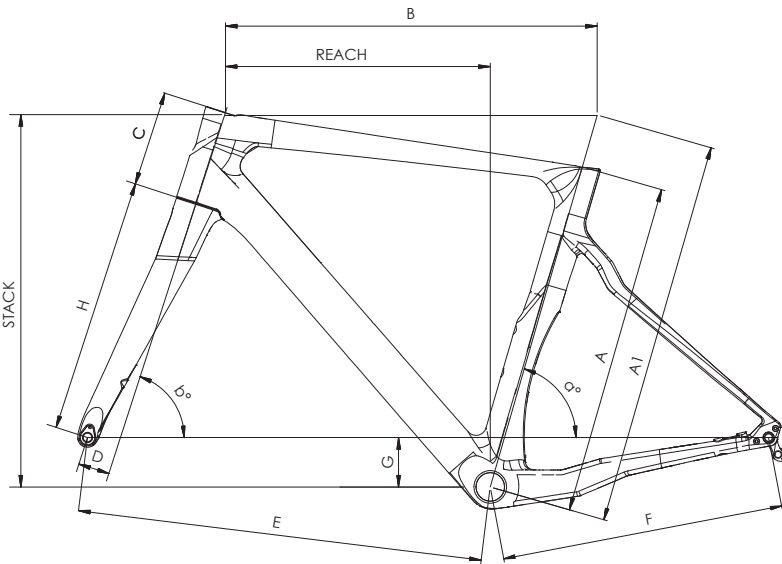

TELAIO FRAME	TELAIO FRAME	P30MQ	Q30MP
	FORCELLA FORK	MCipollini BOND EVO DB	MCipollini BOND EVO DB
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	Shimano Ultegra Di2 12s R8150
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	Shimano Ultegra Di2 R8150
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Dura-Ace Di2 R9270	Shimano Ultegra, ST-R8170, BR-R8170
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s	Shimano Ultegra 12s R8100 11-34
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power meter 52-36 12s (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	Shimano Ultegra Power meter R8100-P 52/36 (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	Shimano Pressfit BB72
	ROTORI ROTOR	Shimano RTCL900 160 mm	Shimano RTCL800 160 mm
	CATENA CHAIN	Shimano M9100 12s	Shimano M8100 12s
RUOTE WHEELS		Fulcrum AIRBEAT 400 DB 21 2WF-R AFS	Fulcrum AIRBEAT 400 DB 21 2WF-R AFS
COPERTURE TIRES		Pirelli Cinturato Velo TLR 28-622	Pirelli Cinturato Velo TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)
	MANUBRIO HANDLEBAR		Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia SLR Boost Superflow Carbon Kit	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini BOND EVO	MCipollini BOND EVO
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		7,470 KG	8,200 KG


	O30DP	Kit telaio + manubrio	Frame kit + handlebar	Kit telaio
TELAIO FRAME	TELAIO FRAME	MCipollini BOND EVO DB	MCipollini BOND EVO DB	MCipollini BOND EVO DB
	FORCELLA FORK	MCipollini BOND EVO DB	MCipollini BOND EVO DB	MCipollini BOND EVO DB
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	SRAM RIVAL E-TAP AXS D1	-	-
	DERAGLIATORE DERAILLEUR	SRAM RIVAL E-TAP AXS D1	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	SRAM RIVAL E-TAP AXS Flat Mount	-	-
	PACCO PIGNONI CASSETTE	SRAM XG-1250 D1 X-Glide 10-36, 12 s	-	-
	GUARNITURA CRANK SET	SRAM RIVAL D1 48-35 DUB Glossy Black (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	SRAM DUB ROAD Press Fit 86,5 x 41 mm	-	-
	ROTORI ROTOR	SRAM Paceline Road Centerlock 160 mm	-	-
	CATENA CHAIN	SRAM PC RIVAL D1, 12s	-	-
RUOTE WHEELS		Fulcrum Racing 400 DB	-	-
COPERTURE TIRES		Pirelli Cinturato Velo TLR 28-622	-	-
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	-
	MANUBRIO HANDLEBAR	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)		
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia Model X Superflow	-	-
	REGGISELLA SEATPOST	MCipollini BOND EVO	MCipollini BOND EVO	MCipollini BOND EVO
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	-	-
PESO BICI BIKE WEIGHT		8,500 KG	-	-



Componenti / Components

BOTTOM BRACKET	PRESSFIT 41 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 11 mm; 110 g (Optional: OFFSET 0 mm)
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	930 g
FORK WEIGHT	510 g
MAXIMUM TIRE	51 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
XS	430	557	522	74,7°	70,3°	101	55	600	427	77	405	372	536
S	455	580	538	74,0°	70,7°	122	55	613	427	77	405	378	556
M	480	596	554	73,7°	71,0°	136	55	620	427	77	405	386	572
L	510	620	574	73,4°	71,2°	158	55	633	427	77	405	395	594
XL	545	549	593	73,0°	71,5°	185	55	647	427	77	405	403	621

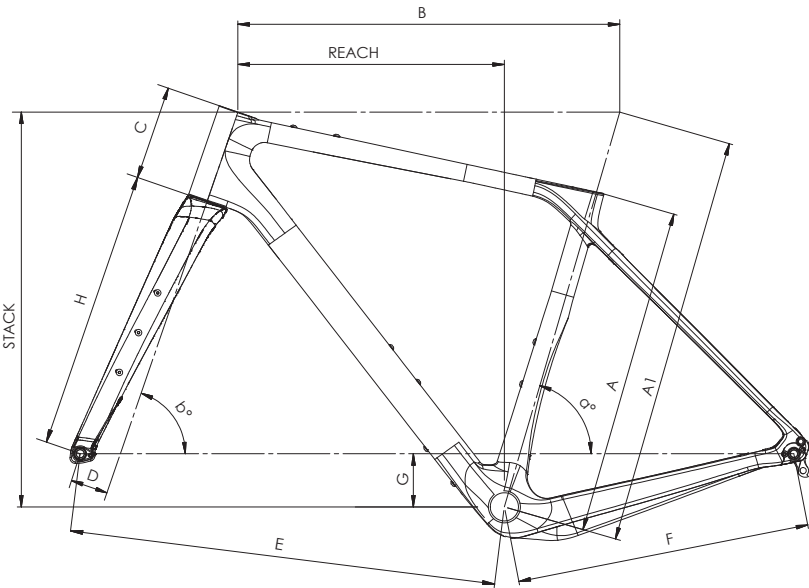

TELAIO FRAME	TELAIO FRAME	R30KR	R30SR
	FORCELLA FORK	MCipollini Ago	MCipollini Ago
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	Campagnolo EKAR 1x13	Campagnolo EKAR 1x13
	DERAGLIATORE DERAILLEUR	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	Campagnolo EP EKAR 1x13 160 mm	Campagnolo EP EKAR 1x13 160 mm
	PACCO PIGNONI CASSETTE	Campagnolo EKAR 13s 9-42	Campagnolo EKAR 13s 9-42
	GUARNITURA CRANK SET	Campagnolo EKAR 13s 38T (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	Campagnolo EKAR 13s 38T (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	Campagnolo BB86 PRO-TECH Press-Fit 86,5x41	Campagnolo BB86 PRO-TECH Press-Fit 86,5x41
	ROTORI ROTOR	Campagnolo AFS 160mm	Campagnolo AFS 160mm
	CATENA CHAIN	Campagnolo EKAR 13s	Campagnolo EKAR 13s
RUOTE WHEELS		Campagnolo LEVANTE 700C DB 2WF N3W	Stan's Crest MK4 / Damiel N3W
COPERTURE TIRES		Pirelli 45-622 Cinturato Gravel M Classic	Vittoria Terreno Dry 47-622 Gravel tan-blk-blk G2.0 OEM
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 70 mm, S: 80 mm, M: 90 mm, L: 100 mm, XL: 110 mm)	FSA ST ROAD NS ACR alloy -6° A9 (XS: 70 mm, S: 80 mm, M: 90 mm, L: 100 mm, XL: 110 mm)
	MANUBRIO HANDLEBAR	FSA HB K-WING ACX (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm)	FSA HB K-WING ACX (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	San Marco GROUND SHORT Open-fit Short 155	San Marco GROUND SHORT Open-fit Short 155
	REGGISELLA SEATPOST	MCipollini Ago	MCipollini Ago
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Gravel - Gunmetal	Supacaz Super Sticky Kush Gravel - Gunmetal
PESO BICI BIKE WEIGHT		8,120 KG	8,270 KG




		O61AS	T31BI
TELAIO FRAME	TELAIO FRAME	MCipollini Ago	MCipollini Ago
	FORCELLA FORK	MCipollini Ago	MCipollini Ago
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	SRAM RIVAL XPLR E-TAP AXS D1 44T (10-44)	Shimano RD-RX820, GRX,12-SPEED
	DERAGLIATORE DERAILLEUR	-	Shimano FD-RX820, GRX
	COMANDI E PINZE LEVERS AND CALIPERS	SRAM RIVAL ETAP AXS HRD FM	Shimano GRX, ST-RX610, BR-RX400
	PACCO PIGNONI CASSETTE	SRAM XG-1251 D1 X-Glide 10-44, 12 s	Shimano CS-HG710-12,12-SPEED, 11-36
	GUARNITURA CRANK SET	SRAM RIVAL D1 DUB 40T (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	Shimano FC-RX610-2, GRX, 46/30 (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	MOVIMENTO CENTRALE BOTTOM BRACKET	SRAM DUB PressFit ROAD WIDE 86,5 mm	Shimano BB-RS500-PB
	ROTORI ROTOR	SRAM Paceline Road Centerlock 160 mm	Shimano SM-RT70, S 160 mm
	CATENA CHAIN	SRAM PC RIVAL D1 12s	Shimano CN-M7100
RUOTE WHEELS		Stan's Crest MK4/Damil	Stan's Crest MK4/Damil
COPERTURE TIRES		Vittoria Mezcal III 44-622 Gravel anth-blk-blk G2.0	Vittoria Mezcal III 44-622 Gravel anth-blk-blk G2.0
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 70 mm, S: 80 mm, M: 90 mm, L: 100 mm, XL: 110 mm)	DEDA GERA alloy (XS: 440 mm, S/M/L: 460 mm, XL: 480 mm; e-e)
	MANUBRIO HANDLEBAR	FSA HB A-WING Pro AGX alloy (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm)	
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	San Marco GROUND SHORT Open-fit Short 155	San Marco GROUND SHORT Open-fit Short 155
	REGGISELLA SEATPOST	MCipollini Ago	MCipollini Ago
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Gravel - Gunmetal	Supacaz Super Sticky Kush Gravel - Gunmetal
PESO BICI BIKE WEIGHT		8,740 KG	8,900 KG

		Kit telaio + manubrio Frame kit + handlebar	Kit telaio Frame Kit
TELAIO FRAME	TELAIO FRAME	MCipollini AGO	MCipollini AGO
	FORCELLA FORK	MCipollini AGO	MCipollini AGO
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILEUR	-	-
	DERAGLIATORE DERAILLEUR	-	-
	COMANDI E PINZE LEVERS AND CALIPERS	-	-
	PACCO PIGNONI CASSETTE	-	-
	GUARNITURA CRANK SET	-	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	-	-
	ROTORI ROTOR	-	-
	CATENA CHAIN	-	-
RUOTE WHEELS		-	-
COPERTURE TIRES		-	-
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS ACR alloy -6° A9 (XS: 70 mm, S: 80 mm, M: 90 mm, L: 100 mm, XL: 110 mm)	-
	MANUBRIO HANDLEBAR	FSA HB K-WING AGX (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm; c-c)	
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	-	-
	REGGISELLA SEATPOST	MCipollini AGO	MCipollini AGO
ACCESSORI ACCESSORIES	NASTRO MANUBRIO BAR TAPE	-	-

Componenti / Components

BOTTOM BRACKET	PRESSFIT 46 X 86,5 mm
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	MODULAR OFFSET 30 : 0 mm; OPTIONAL MODULAR OFFSET 0: -30mm; 140 g
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X100 mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	1110 g
FORK WEIGHT	410 g
STEM WEIGHT	183 g (105mm)
MAXIMUM TIRE	29 mm; (MEASURED WIDTH)


	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
S	430	537	515	74,4°	71,0°	122	45	574	420	72	368	369	517
M	460	560	535	73,0°	72,0°	135	45	584	420	72	368	381	537
L	485	575	555	73,5°	72,5°	150	45	595	420	69	368	392	551
XL	510	595	575	73,0°	73,2°	170	45	603	420	67	368	400	569

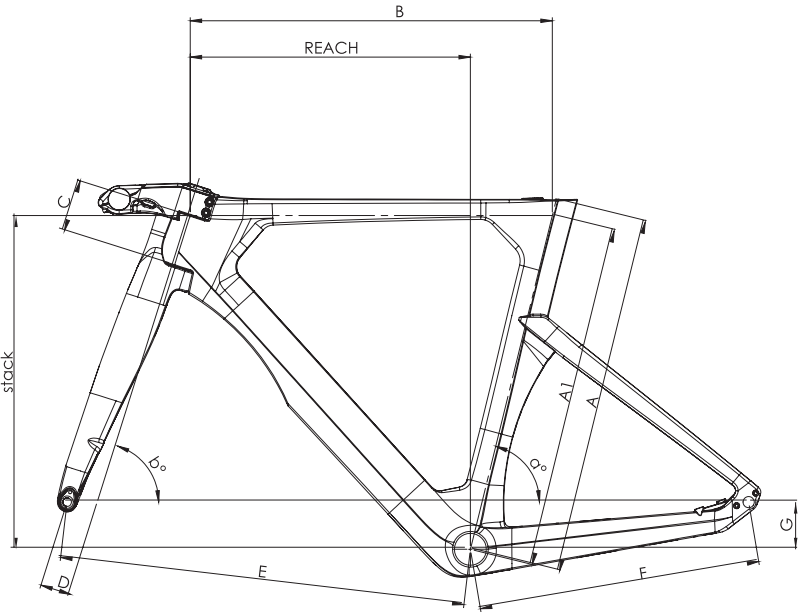

TELAIO FRAME	TELAIO FRAME	P40LF	Q40DF	Kit telaio Frame kit
		MCipollini NKTT DB	MCipollini NKTT DB	MCipollini NKTT DB
TRASMISSIONE TRANSMISSION	FORCELLA FORK	MCipollini NKTT DB	MCipollini NKTT DB	MCipollini NKTT DB
	CAMBIO REAR DERAILLEUR	Shimano Dura-Ace Di2 12s R9250	Shimano Ultegra Di2 12s R8150	-
	DERAGLIATORE DERAILLEUR	Shimano Dura-Ace Di2 R9250	Shimano Ultegra Di2 R8150	-
	COMANDI BAR-END BAR-END SHIFTERS	Shimano Dura-Ace Di2 R9160 Remote TT	Shimano Dura-Ace Di2 R9160 Remote TT	-
	COMANDI FRENO BRAKE LEVERS	Shimano Dura-Ace Di2 ST-R9180 TT & BR-R9270	Shimano Dura-Ace Di2 ST-R9180 TT & BR-R9270	-
	PINZA BRAKE CALIPER			
	PACCO PIGNONI CASSETTE	Shimano Dura-Ace R9200 11-34 12s	Shimano Ultegra 12s R8100 11-34	-
	GUARNITURA CRANK SET	Shimano Dura-Ace R9200P Power Meter 52-36 12s (S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	Shimano Ultegra Power meter R8100-P Power Meter 52/36 (S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	-
	MOVIMENTO CENTRALE BOTTOM BRACKET	Shimano Pressfit BB92-41B	Shimano Pressfit BB72	-
	ROTORI ROTOR	Shimano RTCL900 160 mm	Shimano RTCL800 160 mm	-
	CATENA CHAIN	Shimano M9100 12s	Shimano M8100 12s	-
RUOTE WHEELS	BATTERIA BATTERY	Shimano Battery BT-DN110-A	Shimano Battery BT-DN110-A	-
	CARICABATTERIA CHARGER	Shimano EC300	Shimano EC300	-
COPERTURE TIRES	ANTERIORE FRONT	Campagnolo Bora WTO 45 C19	Fulcrum Racing 400 DB	-
	POSTERIORE REAR	Campagnolo Bora WTO 60 C19		
COCKPIT		Pirelli P Zero Race TLR 28	Pirelli Cinturato Velo TLR 28-622	-
	ATTACCO MANUBRIO STEM	MCipollini NKTT DB	MCipollini NKTT DB	MCipollini NKTT DB
	MANUBRIO HANDLEBAR	Pro Missile EVO	Pro Missile EVO	-
SELLA REGGISELLA SADDLE AND SEATPOST	APPENDICI	Pro Missile EVO Ski Bend	Pro Missile EVO Ski Bend	-
	SELLA SADDLE	ISM PS1.0	Selle Italia Model X Superflow	-
ACCESSORI ACCESSORIES	REGGISELLA SEATPOST	MCipollini NKTT	MCipollini NKTT	MCipollini NKTT
	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair	-
PESO BICI BIKE WEIGHT		8,250 KG	8,530 KG	-

BOTTOM BRACKET	BSA 34,7 mm X 24 TPI
HEADSET	CONICAL 1.1/8"
SEATPOST	MODULAR OFFSET 0 : -30 mm OPTIONAL MODULAR OFFSET 30 : 0 mm;
STEM	90 - 100 mm
FRAME WEIGHT	1350 g
FORK WEIGHT	450 g
MAXIMUM TIRE	DESIGNED FOR 21 mm; MAX 23 mm (MEASURED WIDTH)

	A	A1	B	a° (frame)	b°	C	D	E	F	G	reach	stack
S	480	470	520	75,5°	71°	60	45	579	405	68	378	498
M	520	510	532	75°	72,5°	67,5	45	585	405	68	395,5	509
L	540	530	552	75°	73,5°	82	45	597	405	68	410,5	526,5
XL	560	550	572	75°	73,5°	100	45	617,5	405	68	427	544,5

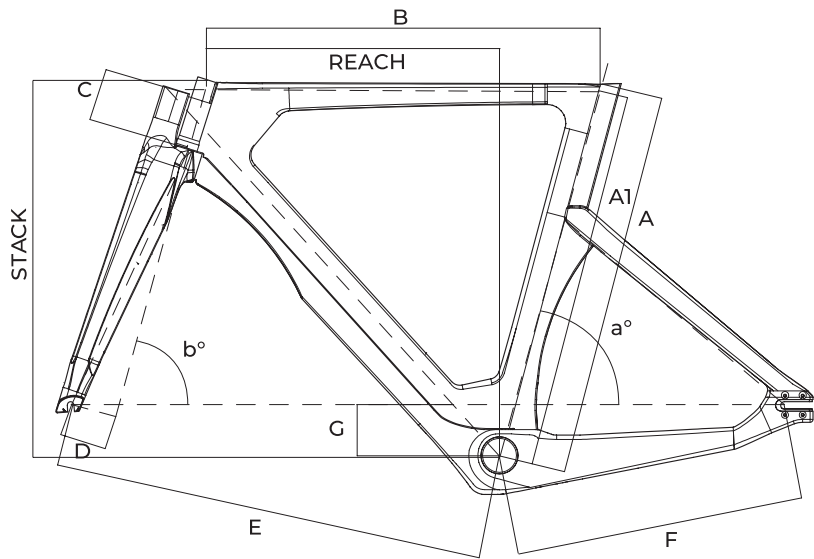


BOTTOM BRACKET	BSA 34,7 mm X 24 TPI
HEADSET	CONICAL 1.1/2"; 1.1/4"
SEATPOST	MODULAR OFFSET 16 mm : -16 mm
FRAME WEIGHT	1400 g
FORK WEIGHT	530 g
MAXIMUM TIRE	DESIGNED FOR 21 mm; MAX 23 mm (MEASURED WIDTH)

LOW MOVEMENT 275MM FROM THE GROUND

	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
XS	476	416	497	75,3°	74,5°	98	40	541	375	51	523	367,9	485,9
S	491	436	510	75°	73,5°	115-95	40	552	375	51	542	377,9	505,1
M	509	459	530	74,5°	74°	130-105	40	564	375	51	565	385,5	519,5
L	528	481	550	74°	74°	150-123	42	581	375	51	585	396,3	535
XL	551	506	570	74°	74,5°	170-138	42	597	375	51	605	409,9	559,2

LOW MOVEMENT 287MM FROM THE GROUND


	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
XS	488	428	497	75,3°	73°	98	40	543	375	63	535	367,9	497,9
S	503	448	510	75°	73,5°	115-95	40	550	375	63	554	377,9	517,1
M	521	471	530	74,5°	74°	130-105	40	562	375	63	577	385,5	531,5
L	540	493	550	74°	74°	150-123	42	579	375	63	597	396,3	547
XL	563	518	570	74°	74,5°	170-138	42	595	375	63	617	409,9	571,2

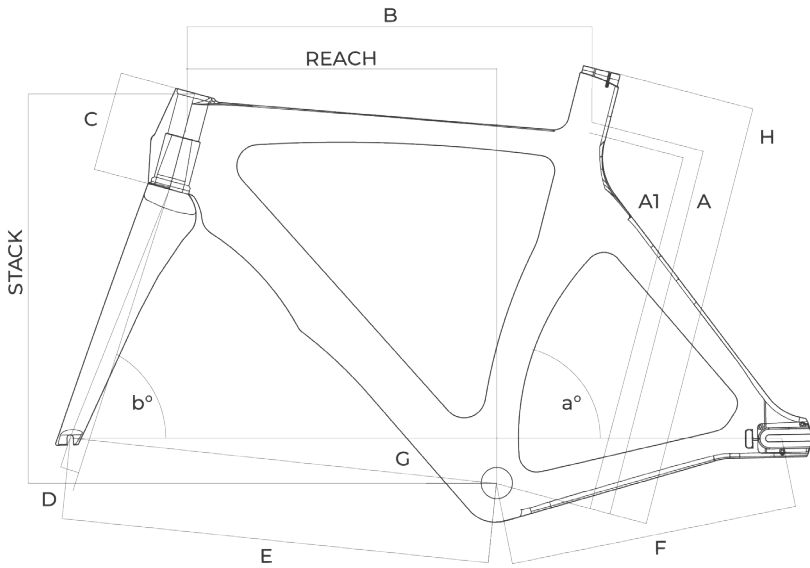

Componenti / Components

BOTTOM BRACKET	ISIS
HEADSET	CONICAL 1.1/2"; 1.1/2"
SEATPOST	OFFSET 0 mm; 140 g
BRAKE SYSTEM	DISC BRAKE (FLAT MOUNT, THRU AXLE 12 X 142 mm - 12 X 100 mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	1.080 g
FORK WEIGHT	410 g
MAXIMUM TIRE	30 mm (MEASURED WIDTH)

	A	A1	B	a°	b°	C	D	E	F	G	H	reach	stack
S	430	537	515	74,4°	71,0°	122	45	574	420	72	368	369	517
M	460	560	535	73,0°	72,0°	135	45	584	420	72	368	381	537
L	485	575	555	73,5°	72,5°	150	45	595	420	69	368	392	551
XL	510	595	575	73,0°	73,2°	170	45	603	420	67	368	400	569

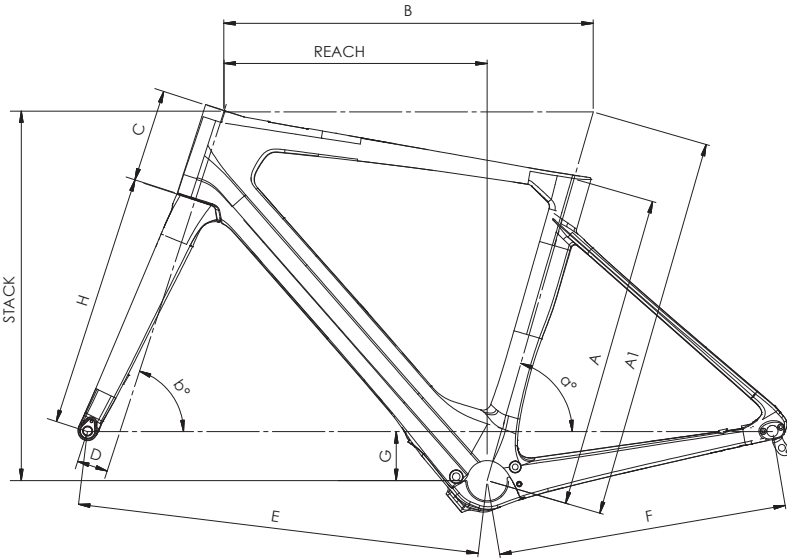


TELAIO FRAME	TELAIO FRAME	O70UG	O40OP
	FORCELLA FORK	MCipollini Flusso TCM	MCipollini Flusso TCM
TRASMISSIONE TRANSMISSION	CAMBIO REAR DERAILLEUR	SRAM RIVAL E-TAP AXS D1 Glossy Black	SRAM RIVAL E-TAP AXS D1 Glossy Black
	DERAGLIATORE DERAILLEUR	SRAM RIVAL E-TAP AXS D1	-
	COMANDI LEVERS	SRAM RIVAL E-TAP AXS DISC Flat Mount	SRAM RIVAL E-TAP AXS DISC Flat Mount
	PINZA CALIPER		
	PACCO PIGNONI CASSETTE	SRAM XG-1250 D1 X-Glide 10-36, 12 velocità	SRAM XG-1250 D1 X-Glide 10-36, 12 velocità
	INGRANAGGI CHAINRING	FSA 2x 48/35	FSA 42T
	PEDIVELLE CRANK SET	FSA SL-K Road e-bike CK-8685-1/IS (S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	FSA CK E-BIKE CK-746-2/IS armset 172.5mm (S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	ROTORI ROTORS	SRAM Paceline Road Centerlock 160 mm	SRAM Paceline Road Centerlock 160 mm
	CATENA CHAIN	SRAM PC RIVAL D1, 12s	SRAM PC RIVAL D1, 12s
	CARICABATTERIA CHARGER	E-TAP AXS Powerpack	E-TAP AXS Powerpack
MOTORE MOTOR	DRIVE UNIT	Maxon Bikedrive AIR	Maxon Bikedrive AIR
	BATTERY	Maxon Bikedrive AIR 250 Wh	Maxon Bikedrive AIR 250 Wh
	HMI	Maxon Bikedrive AIR	Maxon Bikedrive AIR
	CHARGING PORT	Maxon Bikedrive AIR	Maxon Bikedrive AIR
	SPEED SENSOR	Maxon Bikedrive AIR	Maxon Bikedrive AIR
	SPIDER	Maxon Bikedrive AIR 5 bolts 110 for road	Maxon Bikedrive AIR 5 bolts 110 for road
RUOTE WHEELS		Tune Schwarzbrenner 20 Skyline Disc - Endurance body	Tune TSR22 Disc - Endurance body
COPERTURE TIRES		Pirelli P Zero Race TLR 28-622	Pirelli Cinturato Velo TLR 28-622
COCKPIT	ATTACCO MANUBRIO STEM	Deda Alanera (XS: 90x420 mm, S-M: 110x440 mm, L: 120x440 mm, XL: 130x460 mm; e-e)	FSA ST ROAD NS ACR alloy -6° (S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)
	MANUBRIO HANDLEBAR		Vision Trimax Aero ACR (S/M/L: 420 mm, XL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	San Marco Shortfit Superleggera Wide	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini Flusso	MCipollini Flusso
ACCESSORI ACCESSORIES	LUCE POSTERIORE BACK LIGHT	Supernova E3 Tail Light 2 0,5 W 1.450 mm cable	Supernova E3 Tail Light 2 0,5 W 1.450 mm cable
	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		11,300 KG	12,100 KG

Componenti / Components

BOTTOM BRACKET	Isis
HEADSET	Specific headset (IS52/IS52)
SEATPOST	Offset 0 mm; 140 g - Optional OFFSET 11 mm
BRAKING SYSTEM	Disc Brake (Flat Mount, Thru Axle 12 X 142 Mm - 12 X 100 Mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	1440 g
FORK WEIGHT	470 g
MAXIMUM TIRE	Max 47 mm (Measured width) on 700c Recommended 42 mm (Measured width) su 700c

	A	A1	B	a°	b°	C	D	E	F	G	reach	stack
XS	434	595	530	73,5°	71,5°	126	48.5	580	440	80	361	572
S	458	602	542	73,5°	71,5°	132	48.5	592	440	80	370	578
M	484	612	560	73,5°	72,5°	136	48.5	602	440	80	386	586
L	504	635	580	73,5°	72,5°	160	48.5	621	440	80	400	610
XL	526	662	600	73,5°	72,5°	186	48.5	642	440	77,5	412	635

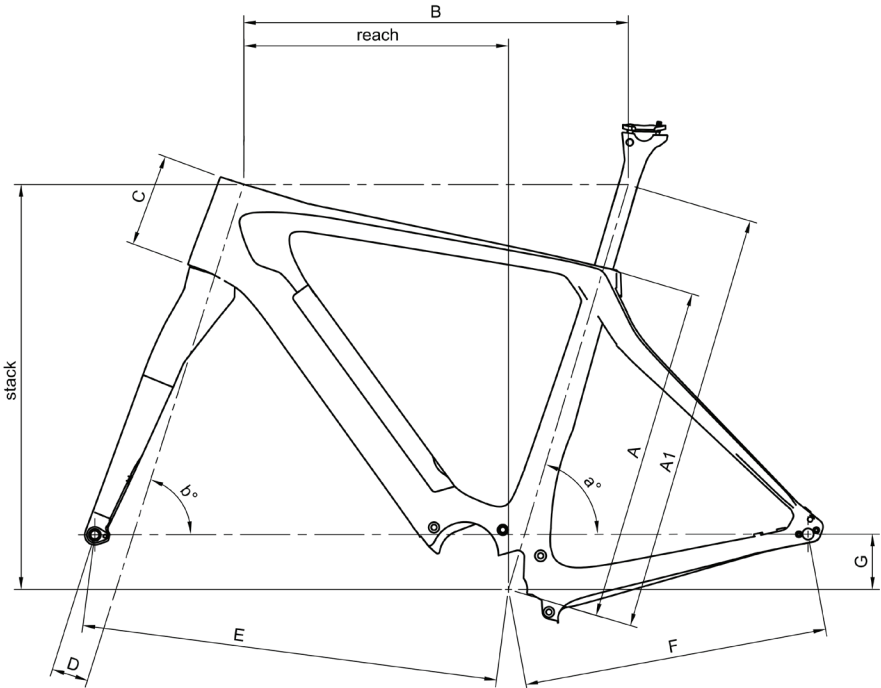


TELAIO FRAME	Q50HT		O40IU
	TELAIO FRAME	MCipollini Fybra	MCipollini Fybra
TRASMISSIONE TRANSMISSION	FORCELLA FORK	MCipollini Fybra	MCipollini Fybra
	CAMBIO REAR DERAILLEUR	Shimano Ultegra Di2 12s R8150	SRAM RIVAL E-TAP AXS D1
	COMANDI E PINZE LEVERS AND CALIPERS	Shimano Ultegra R8170	SRAM RIVAL ETAP AXS HRD FM D1
	PACCO PIGNONI CASSETTE	Classified cassette (11-30) 12s	SRAM XC-1250 D1 X-Glide 10-36, 12 s
	PEDIVELLE CRANK SET	FSA CK E-BIKE CK-746-2/IS armset (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	FSA CK E-BIKE CK-746-2/IS (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	INGRANAGGI CHAINRING	CR ROAD 1X 5h 110x48t WA021	CR ROAD SUPER 1x 5h 110x42T WA669
	ROTORI ROTORS	Shimano RTMT800 160 mm	SRAM Paceline Road Centerlock 160 mm
	CATENA CHAIN	Shimano M8100 12s	SRAM RIVAL D1 12V
MOTORE MOTOR	CARICABATTERIA CHARGER	Shimano CHARGING CABLE, EW-EC300	SRAM E-TAP AXS Powerpack
	DRIVE UNIT	POLINI E-P3+ EVO	POLINI E-P3+ EVO
	BATTERY	POLINI 500 Wh EVO	POLINI 500 Wh EVO
	DISPLAY	Polini TFT EP-3+	Polini TFT EP-3+
	CONTROLLER	Polini Switch Controller Road	Polini Switch Controller Road
	SPEED SENSOR	Polini Speed Sensor	Polini Speed Sensor
RUOTE WHEELS	SPIDER	Polini 5 bolts 110 for road	Polini 5 bolts 110 for road
		Classified Powershift wheels CF G42	Stan's Crest MK4 - Damil hub
COPERTURE TIRES		Pirelli 35-622 Cinturato Velo TLR	Vittoria Terreno Zero 40-622 TLR
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST ROAD NS SMR alloy -6° 1-1/8 + "MC" stem clamp (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)	FSA ST ROAD NS SMR alloy -6° 1-1/8 + "MC" stem clamp (XS: 90 mm, S: 100 mm, M: 110 mm, L: 120 mm, XL: 130 mm)
	MANUBRIO HANDLEBAR	FSA HB ROAD SL-K Compact ACR carbon (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)	Vision Trimax Aero ACR (XS: 400 mm, S/M/L: 420 mm, XL: 440 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	Selle Italia SLR Boost Superflow Carbon Kit	Selle Italia Model X Superflow
	REGGISELLA SEATPOST	MCipollini Fybra	MCipollini Fybra
ACCESSORI ACCESSORIES	LUCE ANTERIORE FRONT LIGHT	Supernova MINI 2 PRO	Supernova MINI 2 PRO
	LUCE POSTERIORE BACK LIGHT	Supernova E3 Tail Light 2	Supernova E3 Tail Light 2
	LOCALIZZATORE GPS GPS TRACKER	EF Technology GPS Tracker	EF Technology GPS Tracker
	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Classic - Black, Pair	Supacaz Super Sticky Kush Classic - Black, Pair
PESO BICI BIKE WEIGHT		15,680 KG	16,100 KG

Componenti / Components

BOTTOM BRACKET	Isis
HEADSET	Specific headset (IS52/IS52)
SEATPOST	Offset 0 mm; 140 g (R30SS variant) - Optional OFFSET 11 mm
BRAKING SYSTEM	Disk Brake (140/160 Rear Flat Mount, Thru Axle 12 X 142 Mm - 160/180 Front Flat Mount, Thru Axle 12 X 100 Mm)
REAR CALIPER MOUNT THICKNESS	20 mm
FRAME WEIGHT	1440 g
FORK WEIGHT	426 g (without suspension)
MAXIMUM TIRE	Max 50 mm (Measured width) on 700c Recommended 47 mm (Measured width) on 700c

	A	A1	B	a°	b°	C	D	E	F	G	reach	stack
XS	434	595	530	73,5°	71,5°	126	55	588	440	80	361	572
S	458	602	542	73,5°	71,5°	132	55	600	440	80	370	578
M	484	612	560	73,5°	72,5°	136	55	610	440	80	386	586
L	504	635	580	73,5°	72,5°	160	55	629	440	80	400	610
XL	526	662	600	73,5°	72,5°	186	55	650	440	77,5	412	635

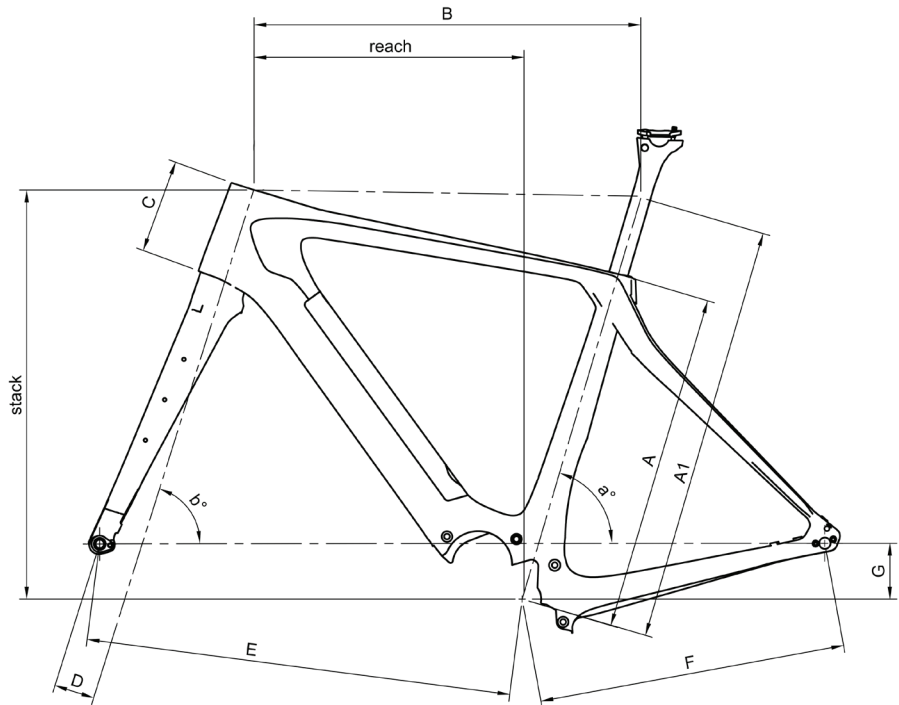

TELAIO FRAME	TELAIO FRAME	O60QR	R30SS
		MCipollini Fybra	MCipollini Fybra
TRASMISSIONE TRANSMISSION	FORCELLA FORK	MCipollini Fybra + HiRide suspension	MCipollini Fybra + HiRide suspension
	CAMBIO REAR DERAILLEUR	SRAM RIVAL XPLR E-TAP AXS D1 Glossy Black	Campagnolo EKAR 1x13
	COMANDI E PINZE LEVERS AND CALIPERS	SRAM RIVAL ETAP AXS HRD FM D1	Campagnolo EP EKAR 1x13
	PACCO PIGNONI CASSETTE	SRAM XG-1251 D1 X-Glide, 12s 10-44	Campagnolo EKAR, 13s 9-42
	PEDIVELLE CRANK SET	FSA CK E-BIKE CK-746-2/IS (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)	FSA CK E-BIKE CK-746-2/IS (XS/S: 170 mm, M/L: 172,5 mm, XL: 175 mm)
	INGRANAGGI CHAINRING	FSA CR ROAD SUPER 1x 110x42T	Campagnolo Ekar 38T
	ROTORI ROTORS	SRAM Paceline Road 160mm	Campagnolo AFS 160 mm
	CATENA CHAIN	PC SRAM RIVAL D1 12s	Campagnolo EKAR 13s
	CARICABATTERIA CHARGER	E-TAP AXS Powerpack	-
MOTORE MOTOR	DRIVE UNIT	POLINI E-P3+ EVO	POLINI E-P3+ EVO
	BATTERY	POLINI 500 Wh EVO	POLINI 500 Wh EVO
	DISPLAY	Polini TFT EP-3+	Polini TFT EP-3+
	CONTROLLER	Polini Switch Controller Road	Polini Switch Controller Road
	SPEED SENSOR	Polini Speed Sensor	Polini Speed Sensor
	SPIDER	Polini 5 bolts 110 for road	Polini 4 bolts Ekar
RUOTE WHEELS		SCHMOLKE TLO GRAVEL TLR DISC - DTSwiss 240 hub	Stan's Crest MK4 - Dami hub
COPERTURE TIRES		Pirelli 45-622 Cinturato Gravel M Classic	Vittoria Terreno Dry 47-622 Gravel tan
COCKPIT	ATTACCO MANUBRIO STEM	FSA ST AGX NS SMR alloy 0° 1-1/4 + "MC" stem clamp (XS: 80 mm, S: 80 mm, M: 100 mm, L: 100 mm, XL: 120 mm)	FSA ST AGX NS SMR alloy 0° 1-1/4 + "MC" stem clamp (XS: 80 mm, S: 80 mm, M: 100 mm, L: 100 mm, XL: 120 mm)
	MANUBRIO HANDLEBAR	FSA HB K-WING Pro AGX (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm; c-c)	FSA HB A-WING Pro AGX alloy (XS: 420 mm, S/M/L: 440 mm, XL: 460 mm; c-c)
SELLA REGGISELLA SADDLE AND SEATPOST	SELLA SADDLE	San Marco GROUND SHORT Open-fit Short 155	San Marco GROUND SHORT Open-fit Short 155
	REGGISELLA SEATPOST	Reverb AXS XPLR 27,2 - 75 mm Travel, 400 mm Lenght	MCipollini Fybra
ACCESSORI ACCESSORIES	LUCE ANTERIORE FRONT LIGHT	Supernova MINI 2 PRO	Supernova MINI 2 PRO
	LUCE POSTERIORE BACK LIGHT	Supernova E3 Tail Light 2	Supernova E3 Tail Light 2
	LOCALIZZATORE GPS GPS TRACKER	EF Technology GPS Tracker	EF Technology GPS Tracker
	NASTRO MANUBRIO BAR TAPE	Supacaz Super Sticky Kush Gravel - Gunmetal	Supacaz Super Sticky Kush Gravel - Gunmetal
PESO BICI BIKE WEIGHT		17,100 KG	16,600 KG



///CIPOLLINI

LIVE YOUR RIDE

MCIPOLLINI

Diamant S.R.L.

T. +39 045 665544
info@mcipollini.it
www.mcipollini.com